



Cabinet Powder Coated to Suit.

Rear Mounting Slots

2 REAR MOUNTING BRACKETS PROVIDED

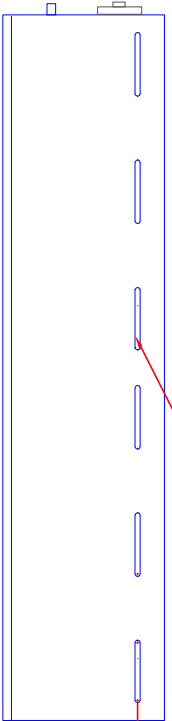

Secure Wall Mount to Suitable Wall Structure with the appropriate Fasteners (Not supplied)

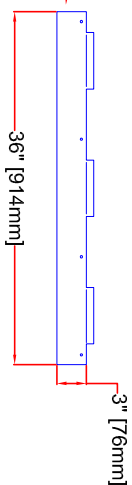

Anchoring bracket 2 provided. Secure to the side or the top of the cabinet with self drilling screws


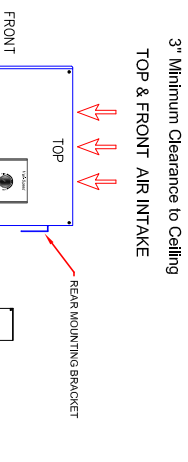
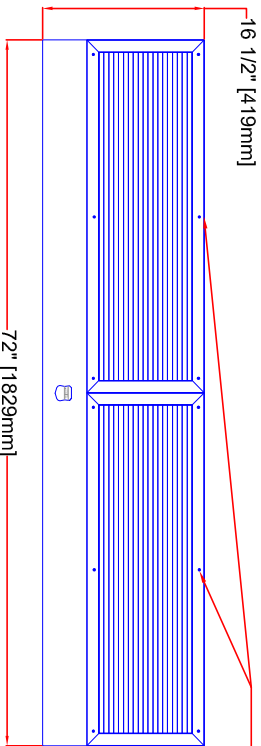

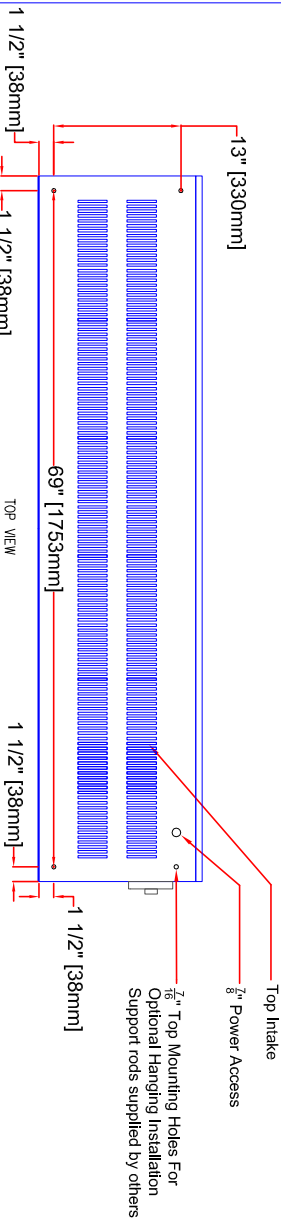



PHOTO SENSOR w/ 5' OF LEAD AND MOUNTING BRACKET. SENSOR IS FACTORY SET WITH 15 SEC OFF DELAY AND PRE PROGRAMED. SEE OWNERS MANUAL FOR RE PROGRAMING THE SENSOR. SENSOR REFLECTOR MINIMUM DISTANCE 3". MAX OF 18" CONSULT MANUFACTURER FOR SPANS GREATER THAN 18". AIR VELOCITY AND VOLUME RANGE APPLIES ONLY TO 208V MODEL

CSA CERTIFIED

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.ca
 www.enershield.ca

Project:	
VOLTAGE 208V Single Phase 60Hz	VOLTAGE 575V Single Phase 60Hz
Motor(s) TEAO, 1075 RPM 3 @ 1/2 hp: 1.5 hp Total 3.5 amp ea (10.5 FLA) Total	Motor(s) TEAO, 1075 RPM 3 @ 1/2 hp: 1.5 hp Total 1.2 amp ea (3.6 FLA) Total
Blowers 3	

Model	Model #
Comfortshield	CS-72
Air Velocity (fpm)/(m/s)	1100-4200/5.6-21.3
Air Volume (cfm) (L/s)	1600-6150/755-2902
Total (Hp) (w)	1.5/1100
Weight (lbs) (kg)	300/136