


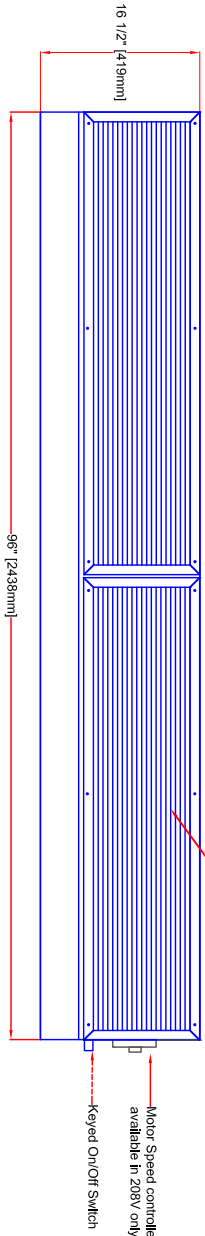
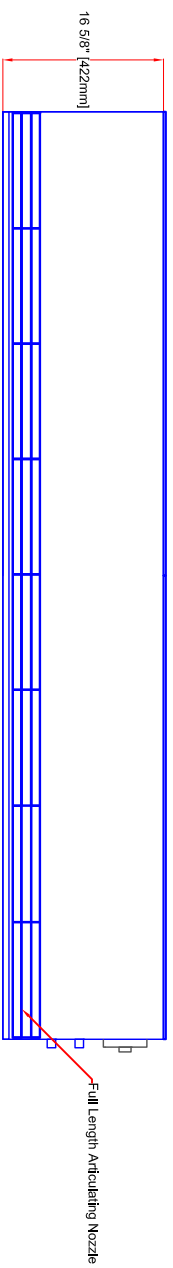


2 REAR MOUNTING BRACKETS
PROVIDED. Optional support stand available

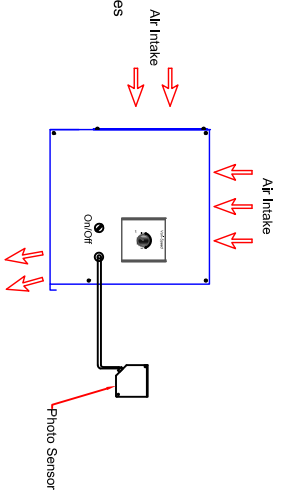

12" Minimum clearance

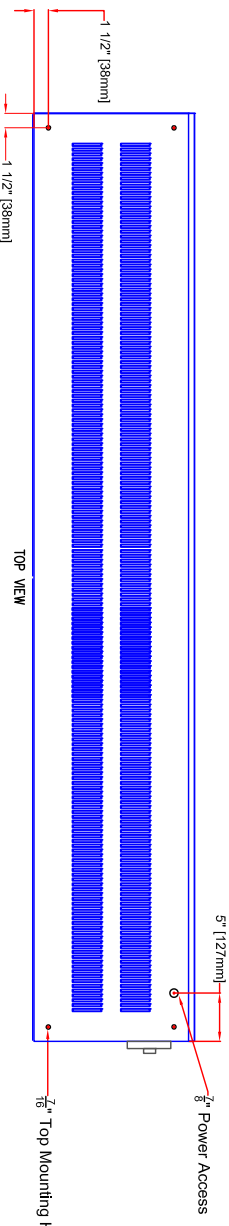

CSA CERTIFIED

EXTERIOR POWDER COATED TO SUIT

- Notes:
- 1) Electrical connections and disconnect by others.
 - 2) See owners manual for complete installation instructions.
 - 3) Installation by others. Installer is responsible for secure installation.
 - 4) Integral photo sensor has 5' of lead and is supplied with mounting bracket and reflector. Sensor is pre programmed with 15 second off delay. See owners manual for re programming the sensor.

ENERSHIELD INDUSTRIES LTD
16882-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

PROJECT:		MOTOR #	
VOLTAGE 208/1/60		COMFORTSHIELD	
MOTOR (s) 4 @ 1/2 hp = (2 hp total)		CS-96	
VOLTAGE 575/1/60		Air Velocity (fpm) (m/s)	
MOTOR (s) 4 @ 1/2 hp = (2 hp total)		8200/3870	
VOLTAGE 1.2 amps ea. = 4.8 amps FLA		Air Volume (cfm) (l/s)	
MOTOR (s) 4 @ 1/2 hp = (2 hp total)		2 hp/1.5kw	
3.7 amps ea. = 14.4 amps FLA		Weight lbs/Kg	
Blowers 4		300 lbs/136 Kg	
DATE ORDERED	DATE SHIPPED		