
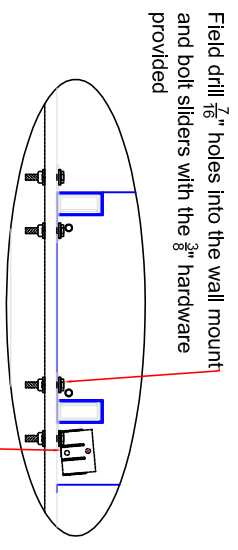
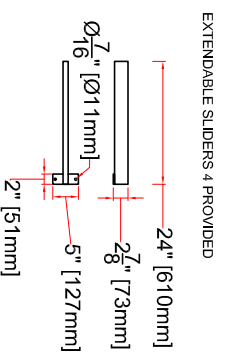
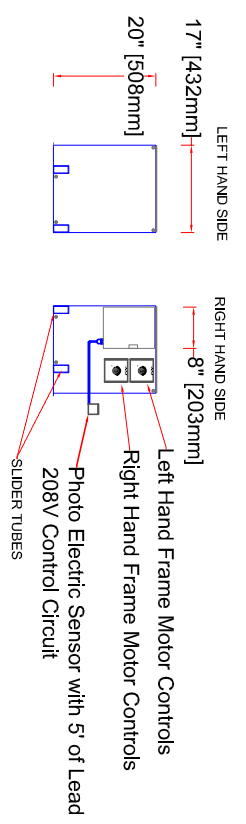


Vertical or High Lift OH Door Shown  
Consult Factory for standard lift door installations

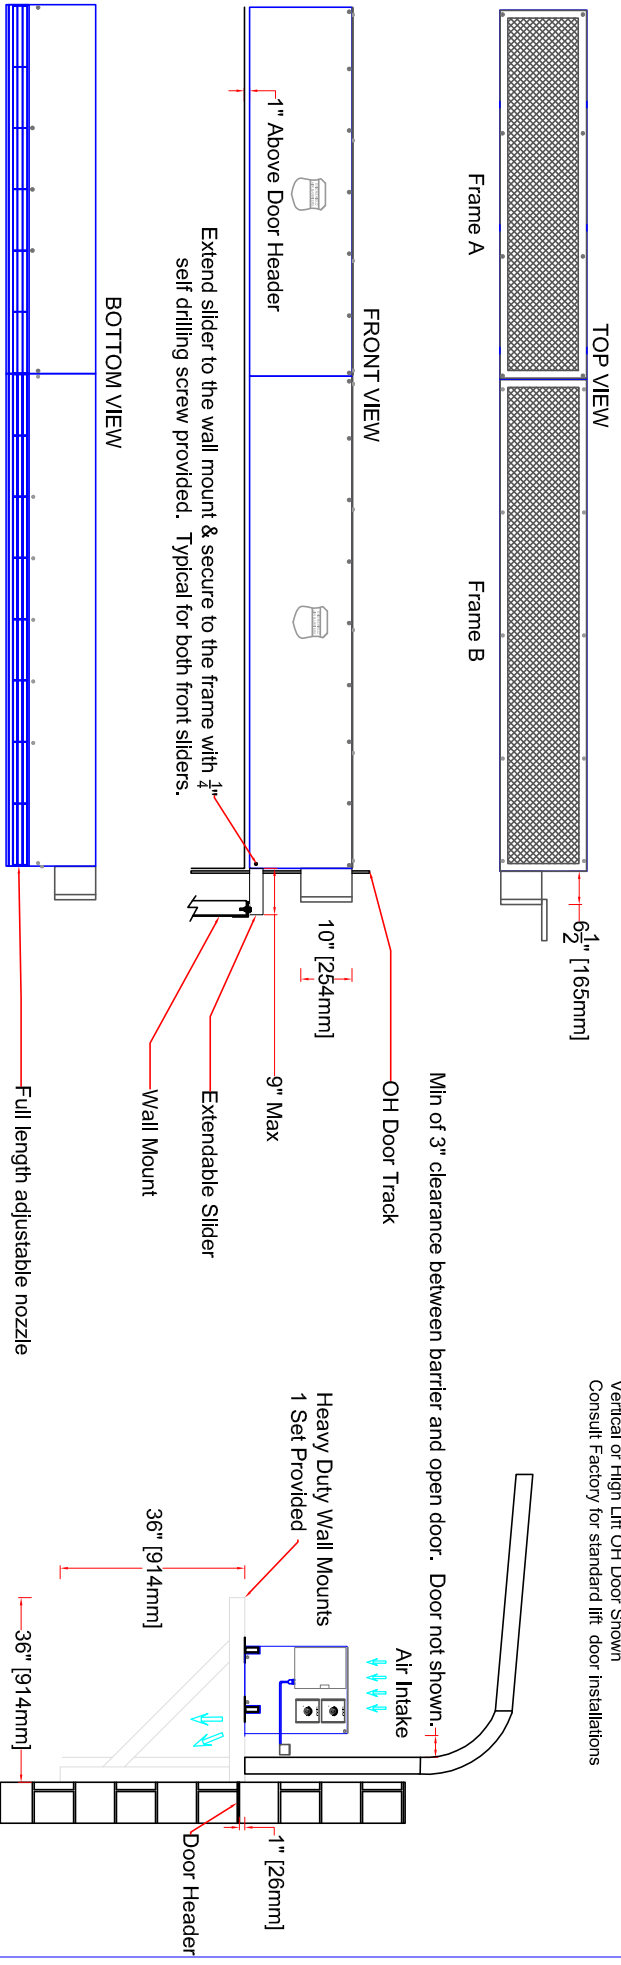

CSA & CWB CERTIFIED Motor Speed Controls Available in 208V Only!

**ENERSHIELD INDUSTRIES LTD**

16821-113 AVENUE  
EDMONTON, ALBERTA T5M 2X2  
PH (780) 482-4662 FAX (780) 482-4074  
E-mail: info@enershield.ca  
www.enershield.ca

**ENERSHIELD AIR CURTAIN**

VOLTAGAGE 208V 1phase 60 HZ	VOLTAGAGE 575V 1phase 60 HZ	Blowers 7
MOTOR (S)	MOTOR (S)	ORDERED DATE
7 @ 1/2 hp = (3.5 hp total)	7 @ 1/2 hp = (3.5 hp total)	DATE
3.7 amps ea. = 25.9 amps FLA	1.2 amps ea. = 8.4 amps FLA	SHIPPED

<b>DURASHIELD</b>	<b>DS-168</b>
Air Velocity (fpm) (m/s)	4500/22.9
Air Volume (cfm) (l/s)	9888/4666
Total hp/watts	3.5 hp/2611W
Weight lbs/Kg	750lbs/341Kg