





EXTENDABLE SLIDERS 4 PROVIDED

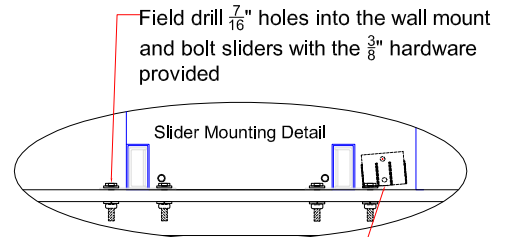

- Notes:
- (1) Electrical connections and disconnect by others.
 - (2) Installer responsible for secure installation.
 - (3) Unit supplied fully assembled.
 - (4) Includes a NEMA 1, remote mounted, lockable, soft starter control panel. 5 second ramp up, with external reset.
 - (5) See owners manual for complete Installation Instructions and operation.

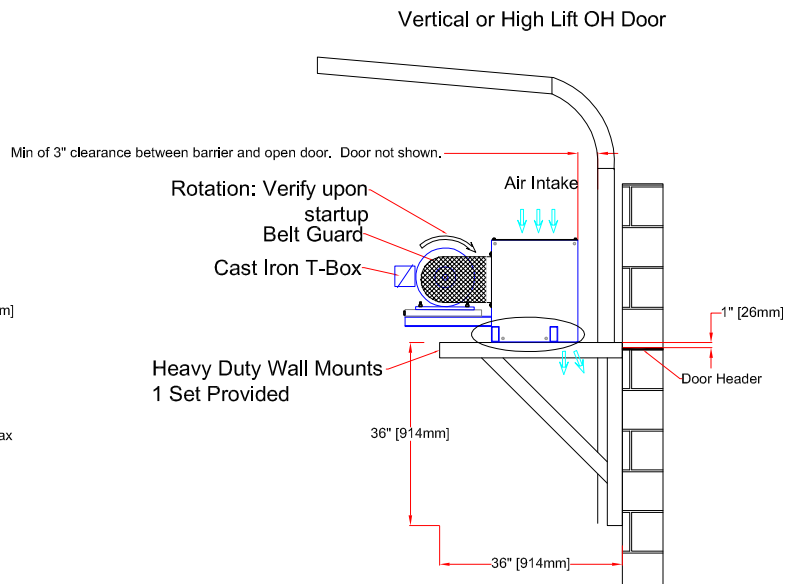

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

CSA & CWB Certified

DSH-120 Right Hand Motor

ENERSHIELD INDUSTRIES LTD
16821-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

DURASHIELD-HD

| Voltage | Voltage | Voltage | Blowers |
|---|---|---|---------|
| 208V/3/ 60Hz | 460V/3/ 60Hz | 575V/3/ 60Hz | 5 |
| Motor(s) 1 @ 7.5 hp TEFC, IP55, 1800 RPM | Motor(s) 1 @ 7.5 hp TEFC, IP55, 1800 RPM | Motor(s) 1 @ 7.5 hp TEFC, IP55, 1800 RPM | |
| 21 Amps FLA | 9.5 Amps FLA | 7.6 Amps FLA | |

| DURASHIELD-HD | DSH-120 |
|--------------------------|-------------|
| Air Velocity (fpm) (m/s) | 5500/27.9 |
| Air Volume (cfm) (l/s) | 16,125/7610 |
| Total hp/watts | 7.5hp/5595 |
| Weight lbs/Kg | 660 / 300 |