


Soft Started Control Panel
 Lockable NEMA 1 V2 Enclosure
 Red Pilot Light
 120V controls
 Individual Motor Overload Protection
 Keyed On/Off Switch-Key removable in both positions
 Photo Sensor w 5' of lead to be field wired to control panel

CSA & CWB CERTIFIED

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.ca
 www.enershield.ca

DURASHIELD-HD		Voltage		Blowers
		208/3/60	460/3/60	
Motors(s) 2 @ 5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 28.8		Motors(s) 2 @ 5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 13		8
Voltage		Voltage		
575/3/60		575/3/60		

DURASHIELD-HD		DSH-192	
Air Velocity (fpm) (m/s)	5500/27.9	Air Velocity (fpm) (m/s)	5500/27.9
Air Volume (cfm) (l/s)	25,800/12,176	Air Volume (cfm) (l/s)	25,800/12,176
Total hp/watts	10/7460 W	Total hp/watts	10/7460 W
Weight lbs/Kg	1056 lbs/480 Kg	Weight lbs/Kg	1056 lbs/480 Kg

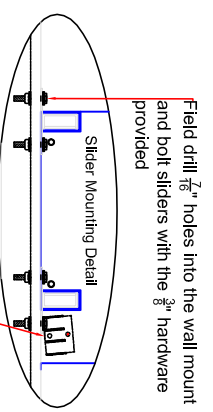

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.