


Soft Started Control Panel
 Lockable NEMA 1 V2 Enclosure
 1500 Fmt Light
 1500 Fmt Light
 Individual Motor Overload Protection
 Keypad On/Off Switch-key removable in both positions
 Photo Sensor w 5' of lead to be field wired to control panel

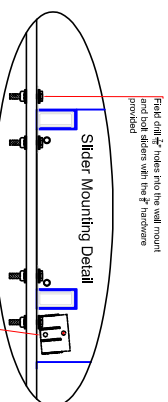

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.ca
 www.enershield.ca

DURASHIELD-HD		Blowers	
Voltage 208/3/60	Voltage 460/3/60	Voltage 575/3/60	
Motor(s) 2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 42	Motor(s) 2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 19	Motor(s) 2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 15.2	10

DURASHIELD-HD		DSH-240	
Air Velocity (fpm) (m/s)	5500/27.9		
Air Volume (cfm) (l/s)	32,250/15,220		
Total hp/watts	15hp/11,190		
Weight lbs/kg	1488/677		

CSA & CMB CERTIFIED