

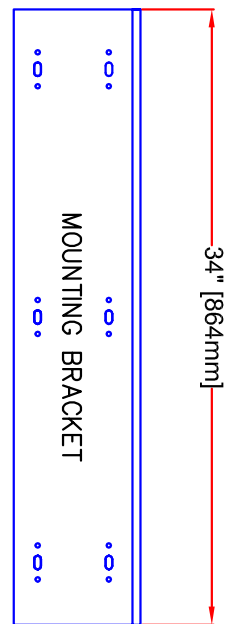


Photosensor w 5' cord & mounting bracket. Sensor comes factory set with 15 second off delay.

6' 120V Grounded Plug

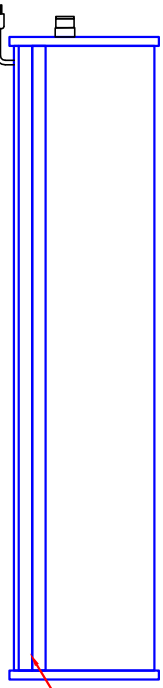


Wall mount can be fixed directly to wall, or may be secured to the extension brackets to extend the Air Barrier off the wall.



DIFFUSER

BOTTOM VIEW

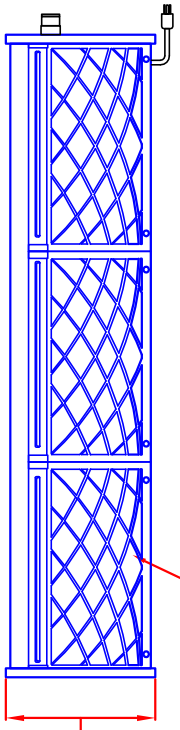


Air Intake

8 1/4" [210mm]

TOP VIEW

35 1/2" [902mm]

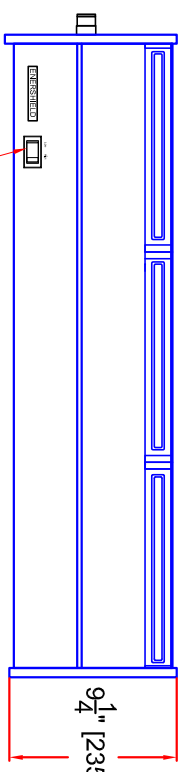

Fan speed selector

FRONT VIEW

9 1/4" [235mm]

CSA Certified

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.ca
 www.enershield.ca

AVAILABLE IN WHITE, BLACK AND ALUMINUM FINISH


VOLTAGE 120V/1/60 Hz
 2 Speed Motors TEAO
 2 @ 1/5 hp = (2/5 hp total)
 Total FLA = 2.7 amps

Designed for optimal efficiency at 7" (2133mm) with balanced building pressure. Consult dealer for varying applications.
 3 Blowers


Project:	
Engineer:	
Tag:	

MICROSHIELD	MCS-36-AP-K
Air Velocity (fpm) (m/s)	3651-3223/18.5-16.4
Air Volume (cfm) (l/s)	1462-1291/690-609
Total hp/watts	2/5 hp/298W
Weight lbs./Kg	36.2 lbs./16.4Kg

For every inch above the door header, move the barrier in 1/2"

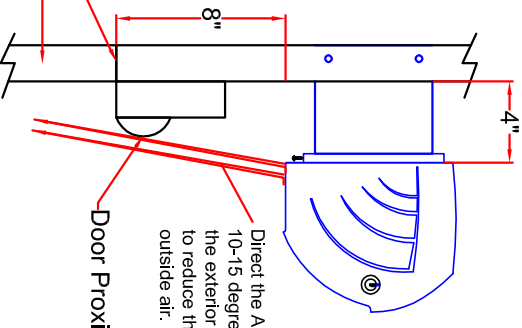

Direct the Air Stream 10-15 degrees towards the exterior of the building to reduce the incursion of outside air.



3 Position Keyed Switch Hand/Off/Auto Key removable in all 3 positions.

Min 2" of clearance to ceiling.

EXTENSION BRACKET 2 PER UNIT
 See Owners Manual for Details

