
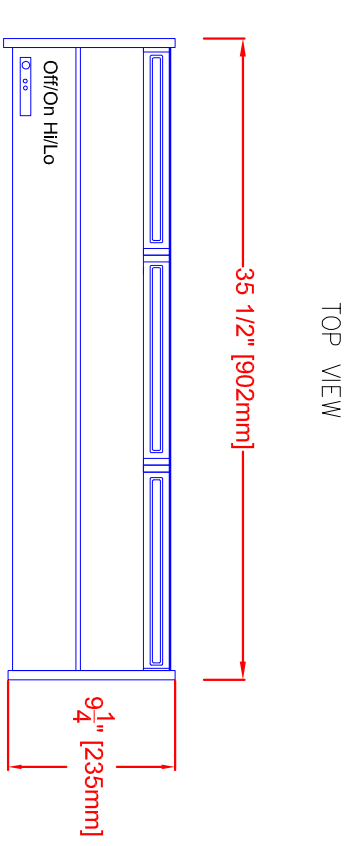
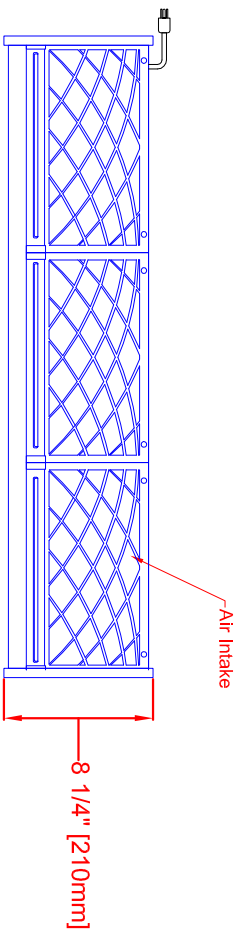


Wall mount can be fixed directly to wall, or may be secured to the extension brackets to extend the Air Barrier off the wall.

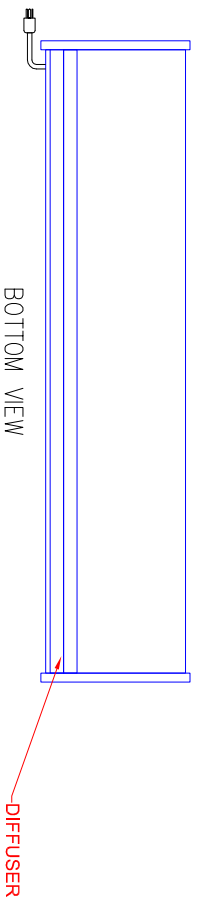

Remote operable
CSA Certified

ENERSHIELD INDUSTRIES LTD
16821-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

AVAILABLE IN WHITE, BLACK AND ALUMINIUM FINISH

VOLTAGE 120V/1/60 Hz
2 Speed Motors TEAO
2 @ 1/5 hp = (2/5 hp total)
Total FLA = 2.7 amps


Designed for optimal efficiency at 7" (2133mm) with balanced building pressure. Consult dealer for varying applications.

Project:	
Engineer:	
Contractor:	


MICROSHIELD

MCS-36

Air Velocity (fpm) (m/s)	3150-2560/16-13
Air Volume (cfm) (l/s)	647-530/305-250
Total hp/watts	2/5 hp/298W
Weight lbs./Kg	36.2 lbs./16.4Kg

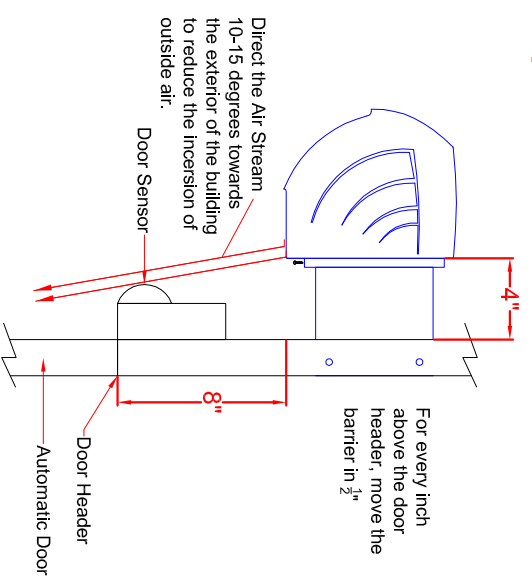

For every inch above the door header, move the barrier in 3/4"

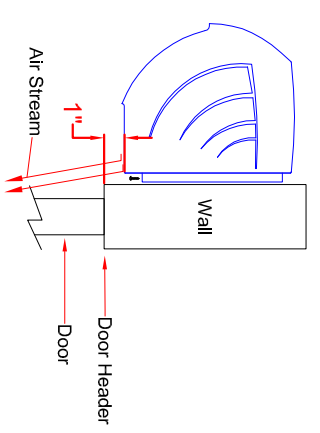

EXTENSION BRACKET 2 PER UNIT
See Owners Manual for Details

