

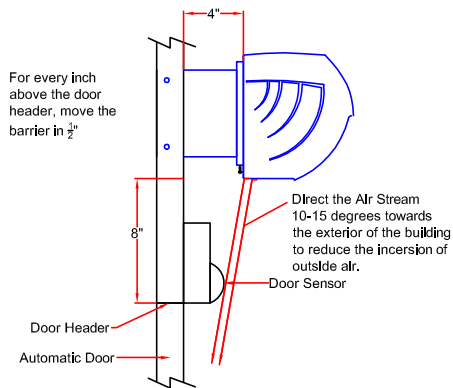
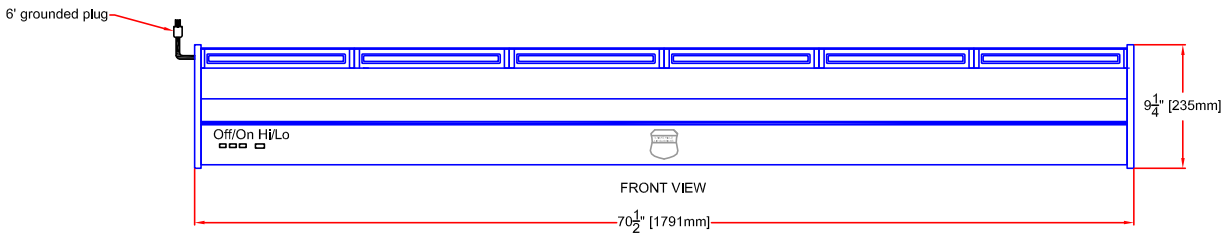
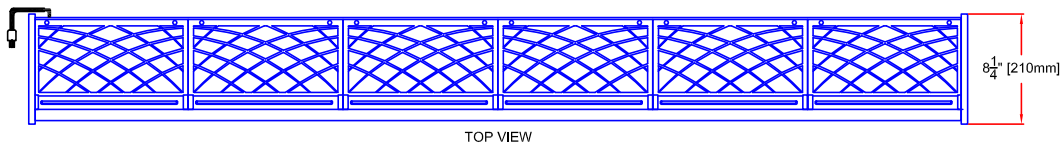
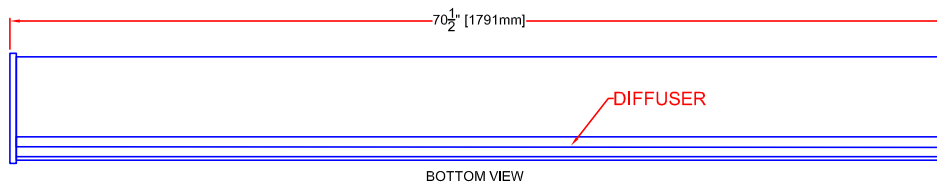
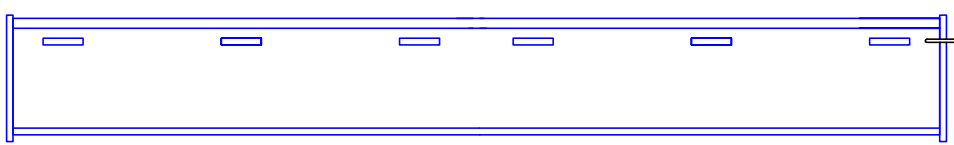


Wall mount can be fixed directly to wall, or may be secured to the extension brackets to extend Barrier off the wall.

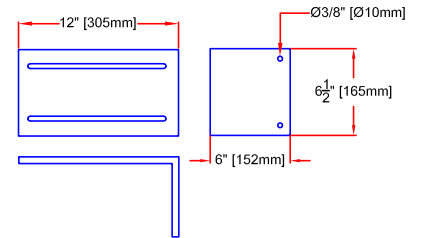

Min 2" of clearance to ceiling.



EXTENSION BRACKET 2 PER UNIT
See Owners Manual for Details

CSA CERTIFIED

ENERSHIELD INDUSTRIES LTD
16821-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

AVAILABLE IN WHITE, BLACK AND ALUMINUM FINISH		MICROSHIELD	MCS-72
VOLTAGE	120V/1/60 Hz	Air Velocity (fpm) (m/s)	3150-2560/16.0-13
	2 Speed Motors TEAO	Air Volume (cfm) (l/s)	1340-1060/632-500
	3 @ 1/5 hp = (3/5 hp total)	Total hp/watts	3/5 hp/447W
	Total FLA = 5.25 amps	Weight lbs/Kg	57.2 lbs/26 Kg
Designed for optimal efficiency at 7" (213mm) with balanced building pressure. Consult dealer for varying applications.	Project:		
Remote Operable	Engineer:		
	Tag:		