
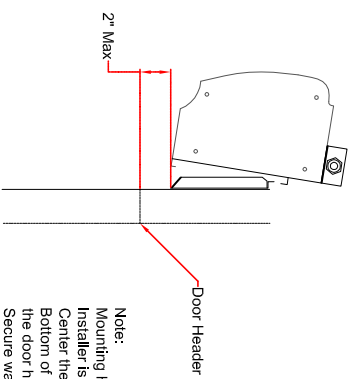


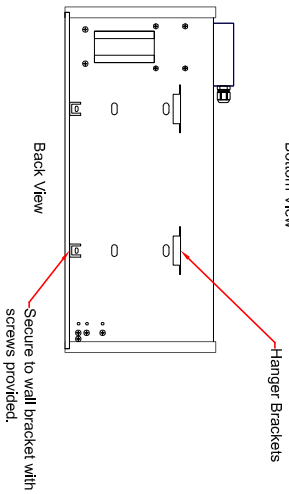
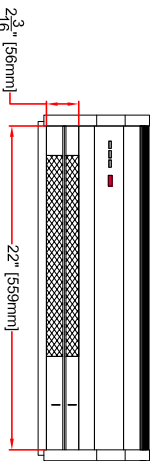
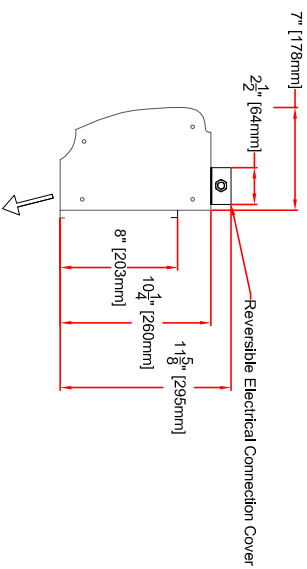
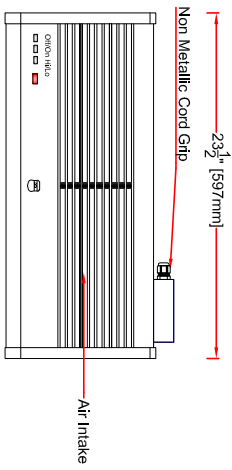


THERMALSHIELD AIR BARRIER TS-24



Note:
 Mounting Hardware is not supplied. Installer is responsible for ensuring a sound installation. Center the wall bracket on the door opening. Bottom of the wall bracket is to be a Max of 2" higher than the door header. Secure wall bracket to wall using the appropriate means. Adjust the diffuser to direct the air stream 5 degrees towards the outside of the building. Unit is equipped with a 3 min off delay timer to cool down the heat coil.
 Neutral Line Required

Color: Aluminum with Black
 Remote Controllable

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.ca
 www.enershield.ca

MODEL	HEATER	VOLTAGE	CFM	FLA	FPM	dB	MOTOR WEIGHT
TS-24	3 Kw	220 3 Phase	HIGH 650 LOW 530	8.6	HIGH 1870 LOW 1670	HIGH 55 LOW 53	1 @ 30W 15 Kg