
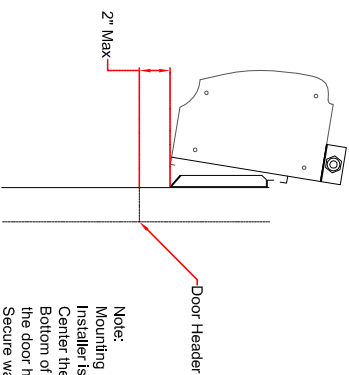
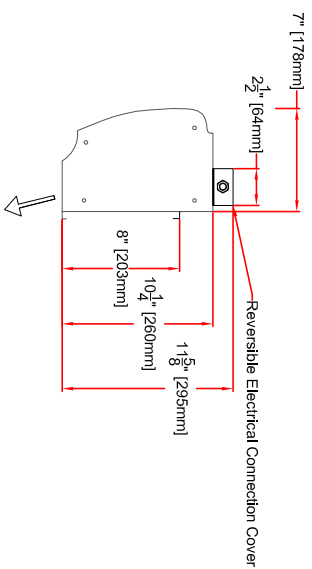
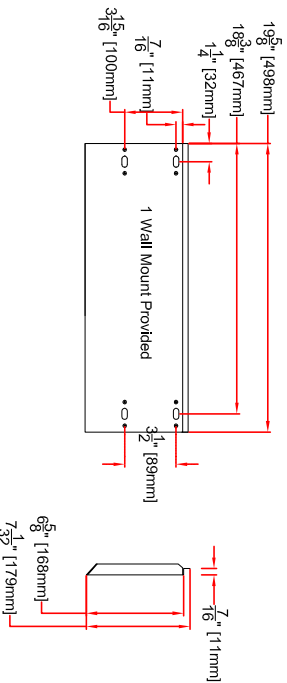
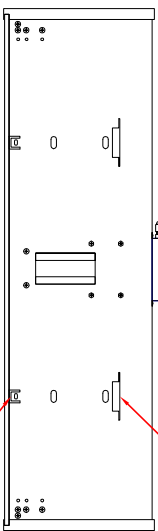
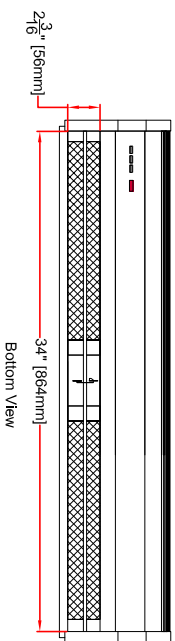


THERMALSHIELD AIR BARRIER TS-36

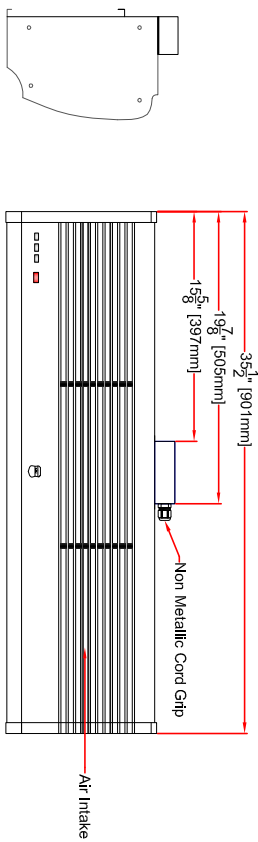

Note:
 Mounting Hardware is not supplied. Installer is responsible for ensuring a sound installation. Center the wall bracket on the door opening. Bottom of the wall bracket is to be a Max of 2" higher than the door header.
 Secure wall bracket to wall using the appropriate means. Adjust the diffuser to direct the air stream 5 degrees towards the outside of the building.
 Unit is equipped with a 3 min off delay timer to cool down the heat coil.
 Neutral Line Required

Color: Aluminum with Black
 Remote Controllable

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.co
 www.enershield.co

MODEL	HEATER	VOLTAGE	CFM	FLA	FPM	dB	MOTOR WEIGHT
TS-36	6 Kw	220 3 Phase	HIGH 940 LOW 850	16.5	HIGH 1870 LOW 1670	HIGH 57 LOW 55	1 @ 30W 17 Kg