
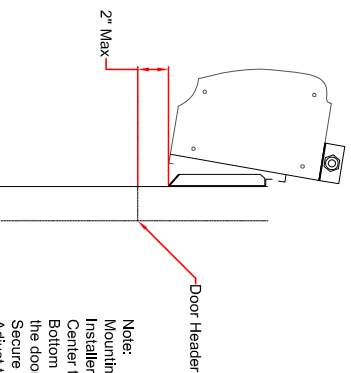

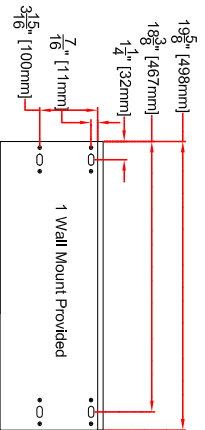
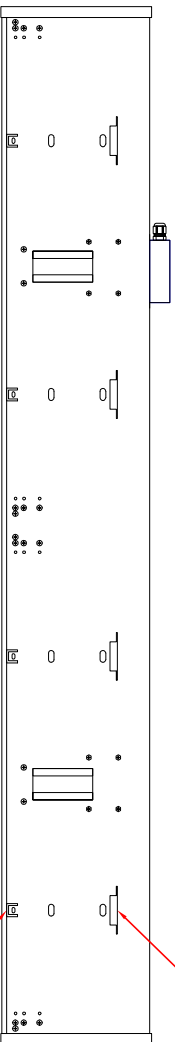
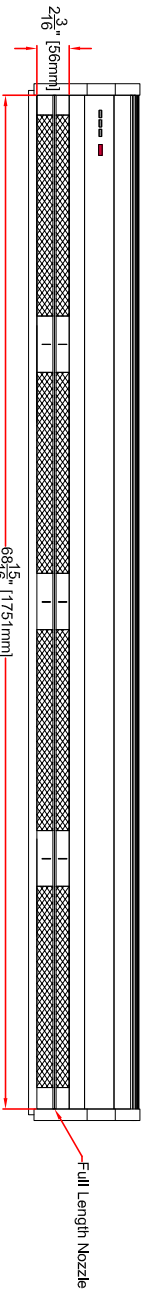
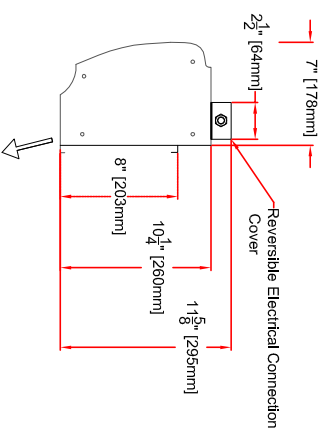
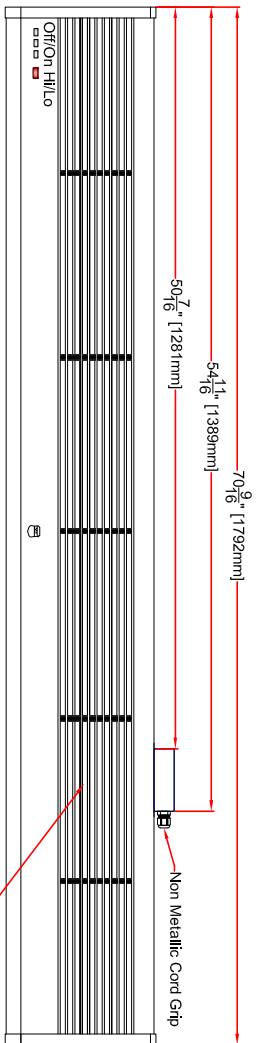


THERMALSHIELD AIR BARRIER TS-72



Note:
 Mounting Hardware is not supplied.
 Installer is responsible for ensuring a sound installation.
 Center the wall bracket on the door opening.
 Bottom of the wall bracket is to be a Max of 2" higher than the door header.
 Secure wall bracket to wall using the appropriate means.
 Adjust the diffuser to direct the air stream 5 degrees towards the outside of the building.
 Unit is equipped with a 3 min off delay timer to cool down the heat coil.
 Neutral Line Required

Color: Aluminum with Black
 Remote Controllable

ENERSHIELD INDUSTRIES LTD
 16821-113 AVENUE
 EDMONTON, ALBERTA T5M 2X2
 PH (780) 482-4662 FAX (780) 482-4074
 E-mail: info@enershield.co
 www.enershield.co

MODEL	HEATER Kw	VOLTAGE	CFM HIGH	CFM LOW	FLA	FPM HIGH	FPM LOW	dB HIGH	dB LOW	MOTOR	WEIGHT
TS-72	12	220 3 Phase	1940	1730	32.3	1870	1670	60	58	2 @ 60W	27 Kg